
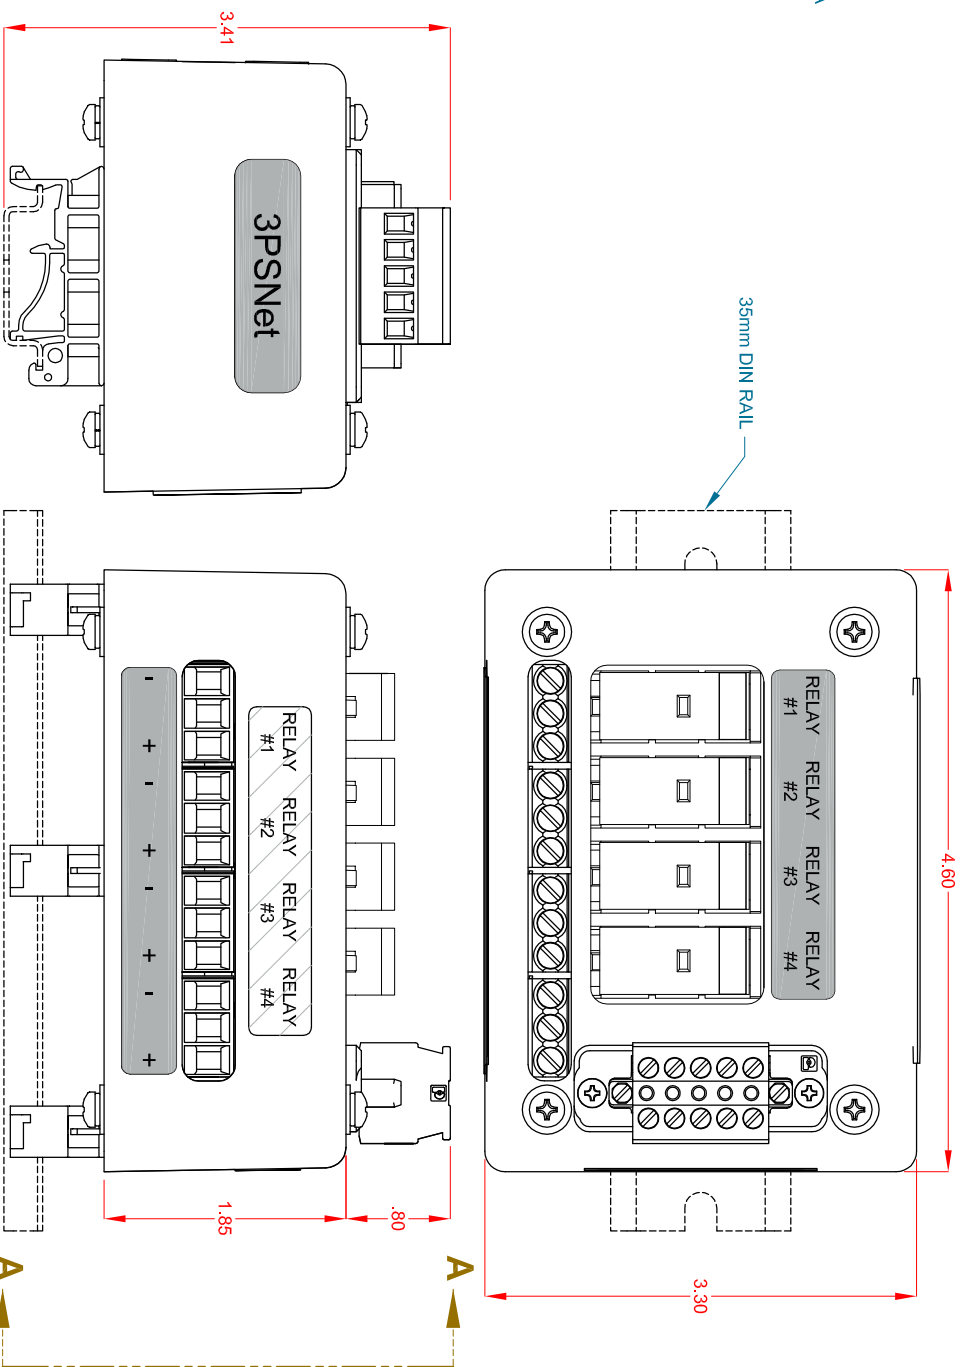


SPECIFICATIONS:

1. GENERAL:
  - 1.1 PROVIDES FOUR CONFIGURABLE MECHANICAL RELAY INPUTS
2. ELECTRICAL:
  - 2.1 INPUT POWER: 9 - 30VDC
  - 2.2 RELAYS: COILS RATED FOR 10A@250VAC OR 30VDC
  - 2.3 DIGITAL CONTROL VIA 3PS DATA NETWORK
3. ENVIRONMENTAL:
  - 3.1 OPERATIONAL TEMPERATURE: -40 TO +65°C
  - 3.2 PROTECTION: INDOOR USE ONLY. TO BE INSTALLED IN A NEMA 4X, IP66 WATERTIGHT ENCLOSURE
  - 3.3 CAUTION: SAFE AREA USE ONLY
4. MECHANICAL:
  - 4.1 POLYCARBONATE PLASTIC HOUSING.

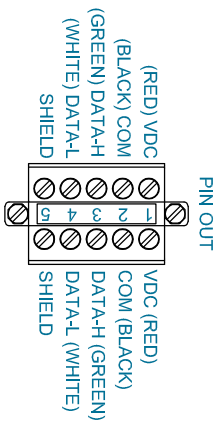

**VIEW A**

REVISIONS		CHANGED BY	APPROVED	DATE
REV	DESCRIPTION			
A	INITIAL RELEASE		R CHISM	03/02/15

EXPORT COMPLIANCE: TRANSFER OF 3PS DATA DOCUMENTS, SOFTWARE DRAWINGS, UNITED STATES OR ABROAD, MAY REQUIRE U.S. GOVERNMENT AUTHORIZATION.

© 2016 by 3PS, INC. THIS DOCUMENT MAY NOT BE COPIED OR REPRODUCED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF 3PS, INC. 3PS, INC. OWNS ALL RIGHTS TO THIS WORK AND INTENDS TO ENFORCE ITS RIGHTS UNDER THE COPYRIGHT LAWS AS A PUBLISHED WORK.

THIRD ANGLE PROJECTION



TOLERANCES (UNLESS OTHERWISE SPECIFIED)

HOLE:	+ .006
DECIMAL: .XXX ± .005	
DECIMAL: .XX ± .01	
DECIMAL: .X ± .01	
ANGLES: ± 1°	
ROUNDSNESS: R.15 MAX. INSIDE CORNER RADIUS IS MAX.	

DESIGNED BY	P BROWN	DATE	03/02/15
CHECKED BY	R CHISM	DATE	03/02/15
RELEASED BY	R CHISM	DATE	03/02/15

SENSOLOGIX <b>3PS, Inc</b> SYSTEMS SERVICES A DASON COMPANY		1300 Arrow Point Dr. Cedar Park, TX
SPECIFICATION CONTROL DRAWING RELAY INPUT MODULE, 4 X 12VDC		
SIZE	DRAWING NO	REV
B	RLM02-005-0	A
SCALE	DO NOT SCALE DRAWING	SHEET
1:1		1 OF 1