


REVISIONS		APPROVED	DATE
REV	DESCRIPTION	M ALKIER	04/26/13
A	INITIAL RELEASE		

- SPECIFICATIONS:
- GENERAL:
 - 1.1 PROVIDES EIGHT CONFIGURABLE MECHANICAL RELAY OUTPUTS
 - ELECTRICAL:
 - 2.1 INPUT POWER: 9 - 30VDC
 - 2.2 RELAYS: COILS RATED FOR 12VDC
 - 2.3 DIGITAL CONTROL VIA 3PS DATA NETWORK
 - ENVIRONMENTAL:
 - 3.1 OPERATIONAL TEMPERATURE: -40 TO +65°C
 - 3.2 PROTECTION: OUTDOOR USE, NEMA 4X, IP66 WATERTIGHT
 - 3.3 CAUTION: SAFE AREA USE ONLY
 - MECHANICAL:
 - 4.1 300 SERIES STAINLESS STEEL MOUNTING PLATE
 - 4.2 WEIGHT: APPROXIMATELY 5.5 LBS
 - 4.3 CAUTION: DO NOT OPERATE, OPEN OR SERVICE WHEN A HAZARDOUS ATMOSPHERE IS PRESENT

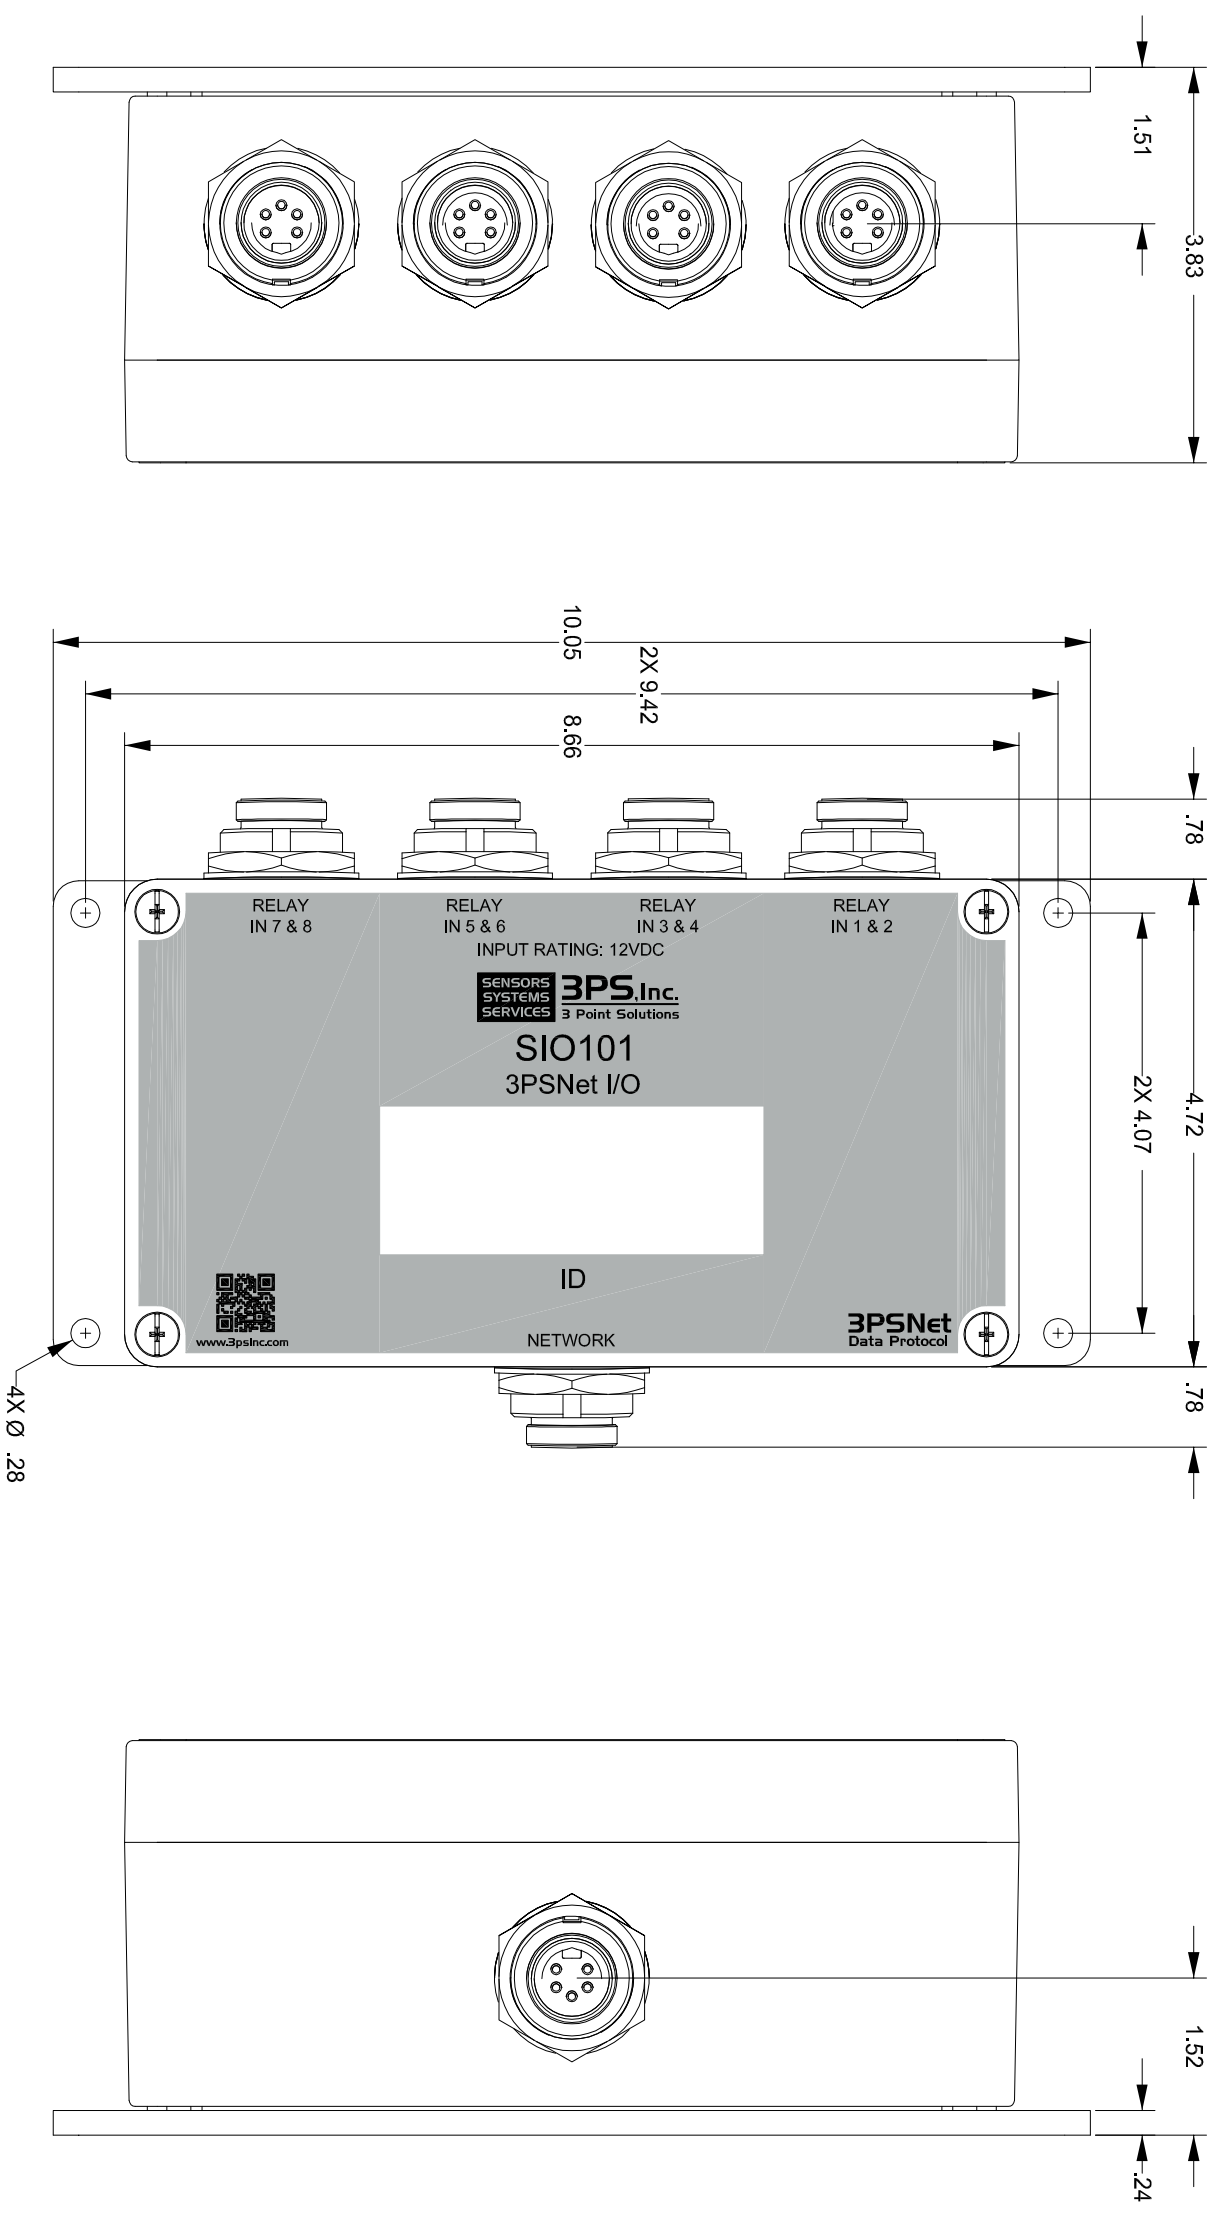

SPECIFICATION DETAIL DRAWING

DRAWN: J PILKINGTON		04/26/13	SENSORS SYSTEMS SERVICES 3 Point Solutions 1300 Arrow Point Dr. Cedar Park, TX
CHECKED: M ALKIER	04/26/13		
RELEASED: M ALKIER	04/26/13		
TITLE: JUNCTION BOX, SWITCH TO 3PSNet, 12V RELAYS			
SIZE: D	CAGE CODE: 1MHK2	DRAWING NO: JBA9999-00008-0	REV: A
SCALE: 1:1	DO NOT SCALE DRAWING		SHEET: 1 OF 1



EXPORT COMPLIANCE: TRANSFER OF 3PS DATA, DOCUMENTS, SOFTWARE, DRAWINGS, SPECS, ETC. BY ANY MEANS TO A FOREIGN PERSON OR ENTITY, WHETHER IN THE UNITED STATES OR ABROAD, MAY REQUIRE U.S. GOVERNMENT AUTHORIZATION.

© 2013 BY 3PS, INC.
 NOTICE: THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPRIETARY INFORMATION, AND AS SUCH, CANNOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF 3PS, INC.

TOLERANCES (UNLESS OTHERWISE SPECIFIED)

HOLE:	+0.01
DECIMAL: .XXX:	±.005
DECIMAL: .XX:	±.01
DECIMAL: .X:	±.1
ANGLES:	±1°
SURFACE FINISH:	125

REMOVE ALL BURRS, BREAK SHARP EDGES R.075 MAX. INSIDE CORNER RADI. .015 MAX.