
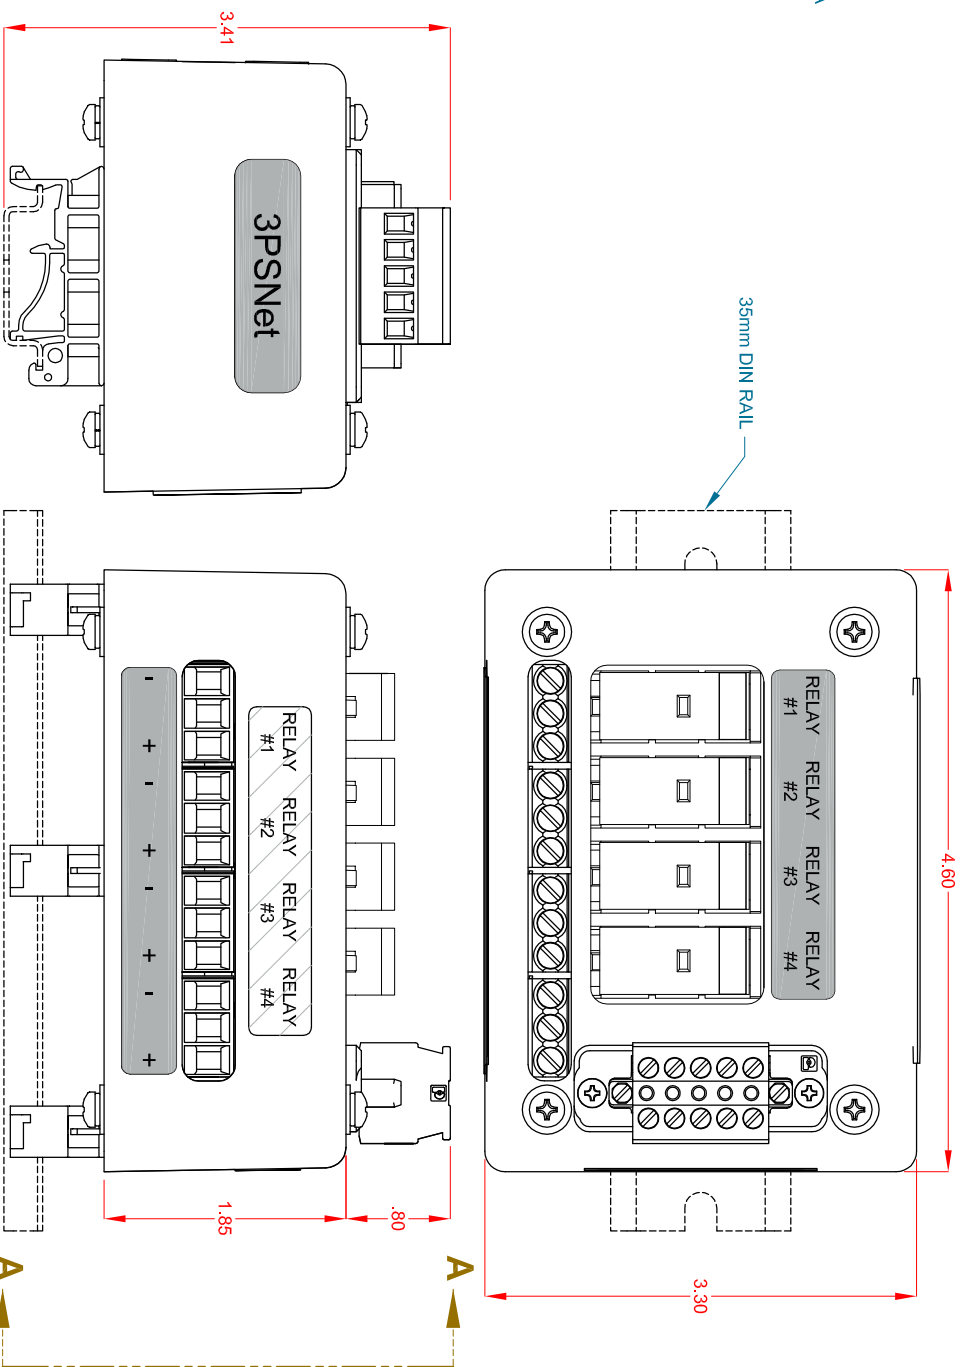


SPECIFICATIONS:

1. GENERAL:
 - 1.1 PROVIDES FOUR CONFIGURABLE MECHANICAL RELAY INPUTS
2. ELECTRICAL:
 - 2.1 INPUT POWER: 9 - 30VDC
 - 2.2 RELAYS: COILS RATED FOR 24VDC
 - 2.3 DIGITAL CONTROL VIA 3PS DATA NETWORK
3. ENVIRONMENTAL:
 - 3.1 OPERATIONAL TEMPERATURE: -40 TO +65°C
 - 3.2 PROTECTION: INDOOR USE ONLY. TO BE INSTALLED IN A NEMA 4X, IP66 WATERTIGHT ENCLOSURE
 - 3.3 CAUTION: SAFE AREA USE ONLY
4. MECHANICAL:
 - 4.1 POLYCARBONATE PLASTIC HOUSING.

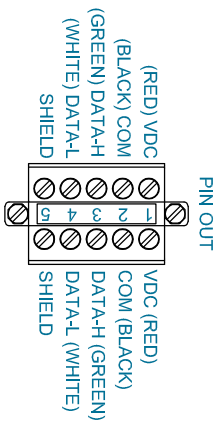

VIEW A

REVISIONS		CHANGED BY	APPROVED	DATE
REV	DESCRIPTION			
A	INITIAL RELEASE		R CHISM	03/02/15

EXPORT COMPLIANCE: TRANSFER OF 3PS DATA DOCUMENTS, SOFTWARE DRAWINGS, UNITED STATES OR ABROAD, MAY REQUIRE U.S. GOVERNMENT APPROVAL.

© 2016 BY 3PS, INC.

THIS DOCUMENT MAY NOT BE COPIED OR REPRODUCED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF 3PS, INC. 3PS, INC. OWNS ALL RIGHTS TO THIS WORK AND INTENDS TO ENFORCE ITS RIGHTS UNDER THE COPYRIGHT LAWS AS A PUBLISHED WORK.

THIRD ANGLE PROJECTION



TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
HOLE:	+ .006
DECIMAL: .XX	± .005
DECIMAL: .XX	± .01
ANGLES:	± 1°
ROUNDS:	R2

REMOVE ALL BURRS
BREAK SHARP EDGES
R.015 MAX. INSIDE
CORNER RADIUS IS MAX.

DESIGNED BY	P BROWN	DATE	03/02/15
CHECKED BY	R CHISM	DATE	03/02/15
RELEASED BY	R CHISM	DATE	03/02/15

SENSEORS		1300 Arrow Point Dr.	
SYSTEMS		Cedar Park, TX	
SERVICES		A DASON COMPANY	
TITLE: RELAY INPUT MODULE, 4 X 24VDC			
SIZE	DRAWING NO.	REV	
B	RLM02-004-0	A	
SCALE	DO NOT SCALE DRAWING	SHEET	1 OF 1