
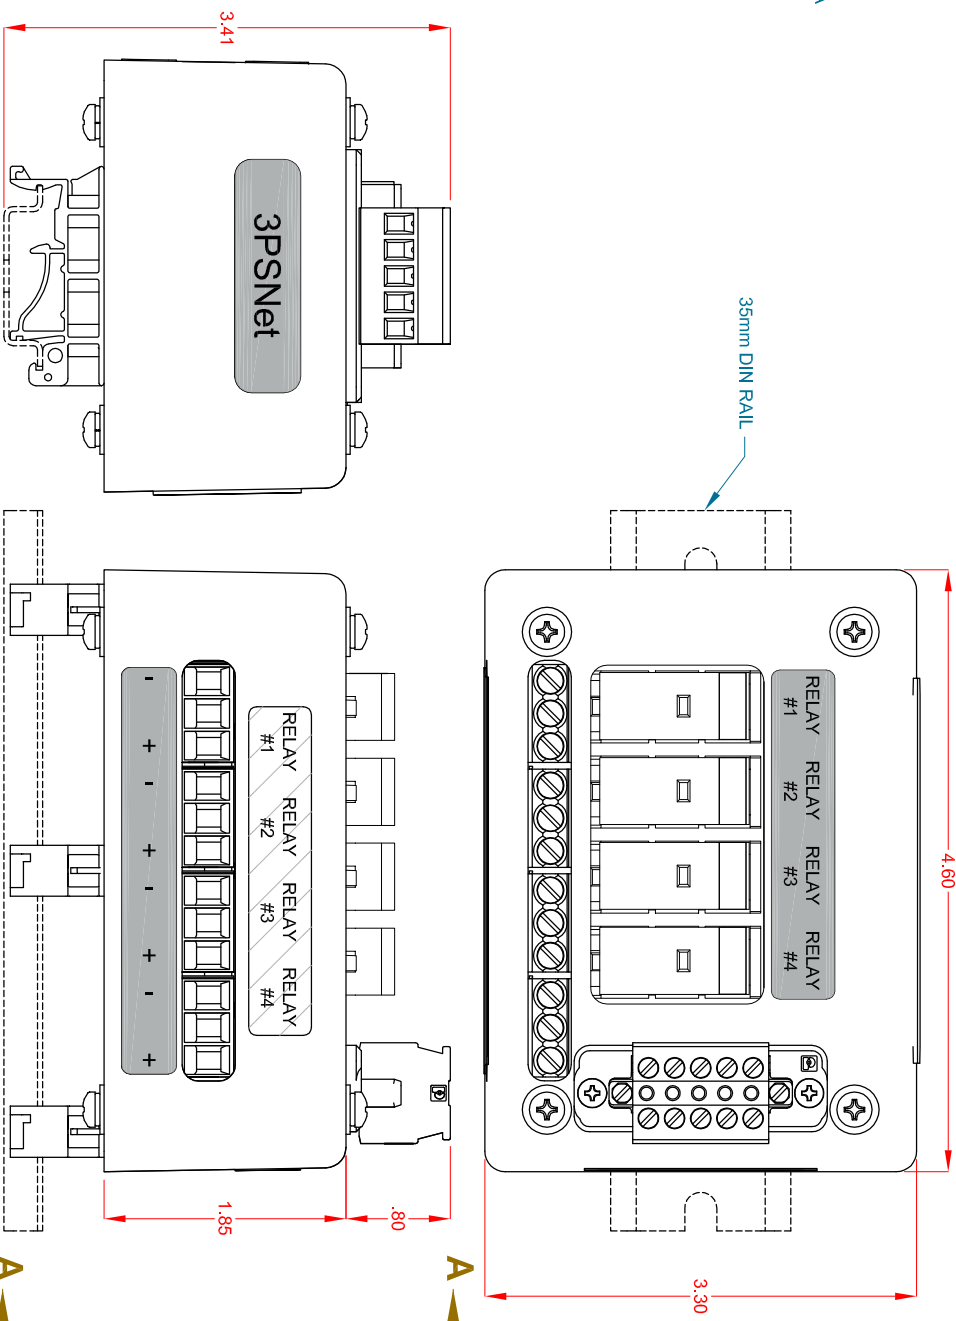


SPECIFICATIONS:

1. GENERAL:
  - 1.1 PROVIDES FOUR CONFIGURABLE MECHANICAL RELAY INPUTS
2. ELECTRICAL:
  - 2.1 INPUT POWER: 9 - 30VDC
  - 2.2 RELAYS: COILS RATED FOR 120VAC
  - 2.3 DIGITAL CONTROL VIA 3PS DATA NETWORK
3. ENVIRONMENTAL:
  - 3.1 OPERATIONAL TEMPERATURE: -40 TO +65°C
  - 3.2 PROTECTION: INDOOR USE ONLY. TO BE INSTALLED IN A NEMA 4X, IP66 WATERTIGHT ENCLOSURE
  - 3.3 CAUTION: SAFE AREA USE ONLY
4. MECHANICAL:
  - 4.1 POLYCARBONATE PLASTIC HOUSING.

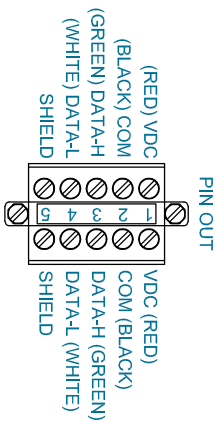

REVISIONS		CHANGED BY	APPROVED	DATE
REV	DESCRIPTION			
A	INITIAL RELEASE		R CHISM	03/02/15

VIEW A

SPECIFICATION CONTROL DRAWING

RELAY INPUT MODULE, 4 X 120VAC

EXPORT COMPLIANCE: TRANSFER OF 3PS DATA DOCUMENTS, SOFTWARE DRAWINGS, UNITED STATES OR ABROAD, MAY REQUIRE U.S. GOVERNMENT APPROVAL.  
 © 2016 by 3PS, INC.  
 THIS DOCUMENT MAY NOT BE COPIED OR REPRODUCED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF 3PS, INC. 3PS, INC. OWNS ALL RIGHTS TO THIS WORK AND INTENDS TO ENFORCE ITS RIGHTS UNDER THE COPYRIGHT LAWS AS A PUBLISHED WORK.



TOLERANCES (UNLESS OTHERWISE SPECIFIED)		03/02/15	SENSEORS	1300 Arrow Point Dr.
HOLE:	+ .006	P BROWN	SYSTEMS	Cedar Park, TX
DECIMAL: .XX	± .005	R CHISM	DESIGN	
DECIMAL: .XX	± .01	RELEASED	ENGINEERING	
ANGLES:	± 1°	R CHISM	3PS, INC.	
ROUNDS:	± .005		A PASON COMPANY	
REMOVE ALL BURRS				
BRAWN SHARP EDGES				
R.015 MAX. INSIDE				
CORNER RADIUS .015 MAX.				
UNLESS OTHERWISE SPECIFIED				
ALL DIMENSIONS ARE IN INCHES				
MILLIMETERS IN BRACKETS				
AFTER FINISH PLATING				
SIZE	OVER CODE	DRAWING NO.	REV	
B	1MHK2	RLM02-006-0	A	
SCALE		SHEET		
1:1		1 OF 1		